

Features

- Direct mount wafer butterfly valve with ISO5211 mount
- Epoxy coated ductile iron body with 316 SS disc
- Unique wave line seat reduces torque and extends seal life
- Visual valve position indicator
- Rugged aluminum Type 4X weatherproof enclosure
- Heavy duty motors with overload protection
- Thermostatically controlled anti-condensation heater
- Manual override with end of travel mechanical stops
- Two auxiliary position confirmation limit switches
- EPS - Electronic Positioning System models available
- Actuators CSA Listed per UL429 and CSA C22.2

Applications

EPDM seals typically used for on-off control of water and other media compatible with the materials of construction. NBR (Buna-N) seals typically used for air, oil, vacuum and other media compatible with the materials of construction. Multi-standard alignment holes, suitable for flanges: ANSI/ASME Class 125/150, EN1092 PN10,PN16, BS10 Table D, E and JIS B2239 10K,16K. Actuators designed for 70% duty cycle.

Operation

On-Off electric actuated valve uses power-to-open and power-to-close, stays in the last known position with loss of power. On receipt of a continuous voltage signal, the motor runs and via a rugged all metal gear system rotates the ball 90°. The motor is automatically stopped by internal cams striking limit switches. On receipt of a reversing continuous signal, the motor turns in the opposite direction reversing the valve position. Power connections direct to terminal strip via included cable connector, or optional 1/2" NPT conduit adapters.

Construction

Valve Body	Epoxy coated ductile iron
Disc	316 stainless steel CF8M
Disc Seat/Liner	EPDM or NBR (Buna-N)
Stem/Stem Seals	420 stainless steel / (2) v-rings same material as seat
Gear Drive	Heavy duty alloy steel/aluminum bronze, self locking
Actuator Enclosure	Aluminum, polyester powder painted, Type 4X, IP67
Visual Valve Position Indicator	Clear Polycarbonate cover, red/yellow open-closed
Fasteners	Stainless Steel
Auxiliary Limit Switches	2 x SPDT (5A/125VAC), on-off actuators only



Description

Electric operated direct mount butterfly valves with epoxy-coated ductile iron wafer body are designed for commercial and industrial applications. Valve mounts between two standard ANSI/ASME Class 150 flanges and includes integral molded flange gaskets. Disc is precision machined 316SS. Two piece stem and disc design enhances the flow capacity and reduces turbulence. Rugged corrosion resistant electric actuator includes a manual override, valve position confirmation switches (on-off units), thermostatically controlled anti-condensation heater, and over-torque protection.

Approvals


Actuators

- CSA Listed to:
 - UL429 and CSA C22.2 no 139
 - Type 4X, IP67 weatherproof enclosure
- CE conformance-EN 60204-1:2006

Valves

- Design complies with API-609, MSS SP-67
- Tests per API-598, AWWA C502-87
- CE conformance- PED 2014/68/UE

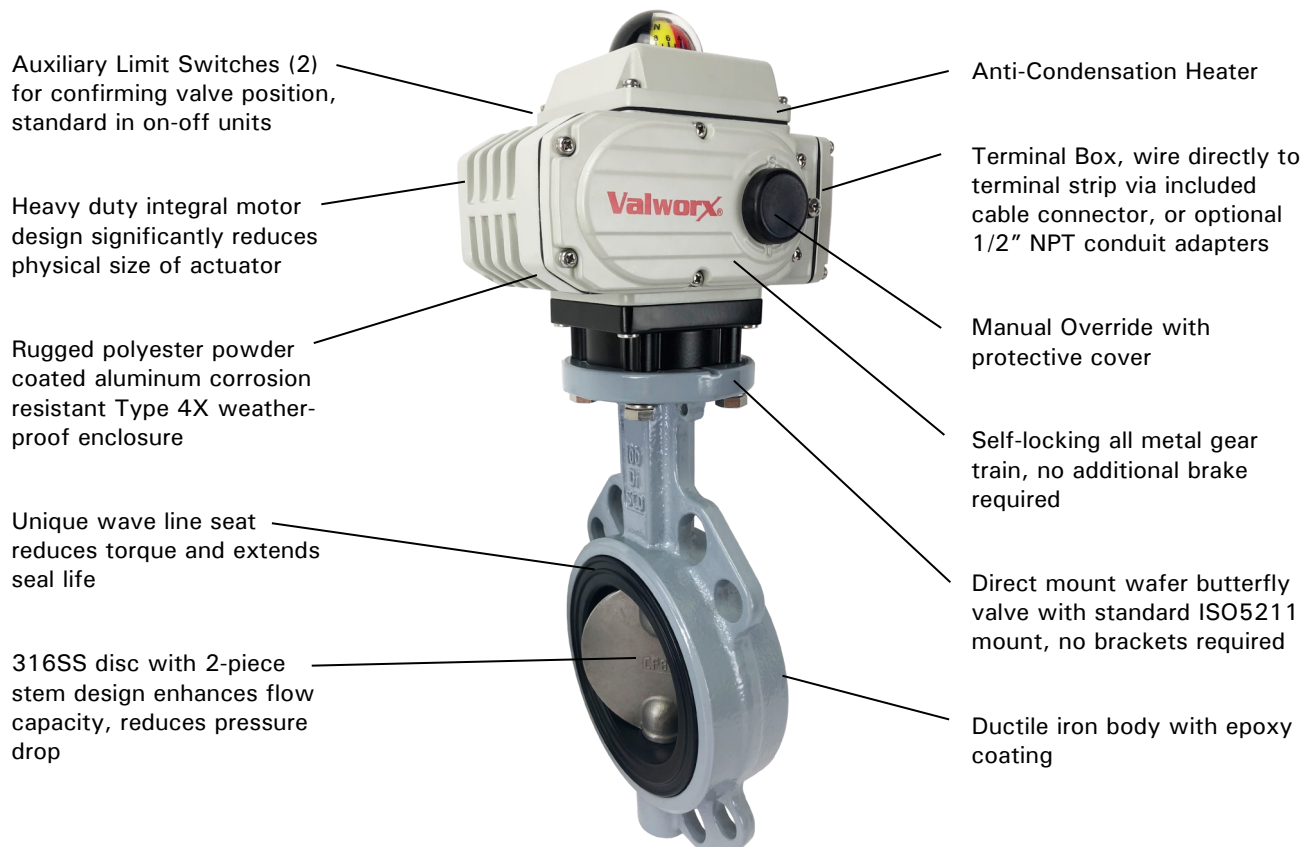

Construction Features**Pressure Rating**

Pressure Rating: 230 PSI (16 Bar), Vacuum 29in Hg, 2-8" sizes
145 PSI (10 Bar) 10-12" sizes

Temperature Rating

Actuator Temperature Rating: -13 to 131° F (-25 to 55° C)
Valve Temperature Rating: EPDM seals 0 to 248° F (-18 to 120°C)
NBR seals 5 to 185° F (-15 to 85°C)



Visual Valve
Position Indicator



Electric Actuated Butterfly Valves

Ductile Iron Wafer Body ASME 150#

Features and P/T Chart

SERIES
5670

Specifications (English units)

Stock Number	Pipe Size (inch)	Orifice Size (inch)	Cv Flow Factor	Pressure Max. (PSI)	Cycle Time/90° (seconds)	Voltage	Current (amps)	Duty Cycle	Electrical Dwg.
120 VAC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, EPDM SEALS									
567002C	2	2.0	124	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567003C	2-1/2	2.6	247	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567004C	3	3.2	470	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567005C	4	3.9	929	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567007A	6	5.9	2243	230	30/25	110 VAC, 50/60Hz	0.73	70%	B
567008A	8	7.69	3584	230	45/37	110 VAC, 50/60Hz	1.27	70%	B
567010A	10	9.8	4498	145	45/37	110 VAC, 50/60Hz	1.27	70%	B
567009A	12	11.8	8498	145	45/37	110 VAC, 50/60Hz	1.27	70%	B
24 VDC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, EPDM SEALS									
567027C	2	2.0	124	230	20	DC24	1.28	70%	G
567028C	2-1/2	2.6	247	230	20	DC24	1.28	70%	G
567029C	3	3.2	470	230	20	DC24	1.28	70%	G
567030C	4	3.9	929	230	20	DC24	1.28	70%	G
567032A	6	5.9	2243	230	30	DC24	3.57	70%	G
567033A	8	7.69	3584	230	45	DC24	6.04	70%	G
567034A	10	9.8	4498	145	45	DC24	6.04	70%	G
567035A	12	11.8	8498	145	45	DC24	6.04	70%	G
120 VAC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, NBR (BUNA-N) SEALS									
567036C	2	2.0	124	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567037C	2-1/2	2.6	247	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567038C	3	3.2	470	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567039C	4	3.9	929	230	25/21	110 VAC, 50/60Hz	0.27	70%	B
567041A	6	5.9	2243	230	30/25	110 VAC, 50/60Hz	0.73	70%	B
24 VDC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, NBR (BUNA-N) SEALS									
567046C	2	2.0	124	230	20	DC24	1.28	70%	G
567047C	2-1/2	2.6	247	230	20	DC24	1.28	70%	G
567048C	3	3.2	470	230	20	DC24	1.28	70%	G
567049C	4	3.9	929	230	20	DC24	1.28	70%	G
567050A	6	5.9	2243	230	30	DC24	3.57	70%	G

• Cv is the GPM of water at 60° F that will pass through the valve with 1 PSI pressure drop



Electric Actuated Butterfly Valves

Ductile Iron Wafer Body ASME 150#
2 to 12 inch On-Off Models

SERIES
5670


Specifications (Metric units)

Stock Number	Pipe Size (inch)	Orifice Size (mm)	Kv Flow Factor	Pressure Max. (Bar)	Cycle Time/90° (seconds)	Voltage	Current (amps)	Duty Cycle	Electrical Dwg.
120 VAC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, EPDM SEALS									
567002C	2	50	107	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567003C	2-1/2	65	212	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567004C	3	80	404	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567005C	4	100	799	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567007A	6	150	1929	16	30/25	110 VAC, 50/60Hz	0.73	70%	B
567008A	8	200	3100	16	45/37	110 VAC, 50/60Hz	1.27	70%	B
567010A	10	250	5200	10	45/37	110 VAC, 50/60Hz	1.27	70%	B
567009A	12	300	7350	10	45/37	110 VAC, 50/60Hz	1.27	70%	B
24 VDC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, EPDM SEALS									
567027C	2	50	107	16	20	DC24	1.28	70%	G
567028C	2-1/2	65	212	16	20	DC24	1.28	70%	G
567029C	3	80	404	16	20	DC24	1.28	70%	G
567030C	4	100	799	16	20	DC24	1.28	70%	G
567032A	6	150	1929	16	30	DC24	3.57	70%	G
567033A	8	200	3100	16	45	DC24	6.04	70%	G
567034A	10	250	5200	10	45	DC24	6.04	70%	G
567035A	12	300	7350	10	45	DC24	6.04	70%	G
120 VAC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, NBR (BUNA-N) SEALS									
567036C	2	50	107	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567037C	2-1/2	65	212	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567038C	3	80	404	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567039C	4	100	799	16	25/21	110 VAC, 50/60Hz	0.27	70%	B
567041A	6	150	1929	16	30/25	110 VAC, 50/60Hz	0.73	70%	B
24 VDC ELECTRIC ACTUATED WAFER BODY BUTTERFLY VALVE, NBR BUNA-N) SEALS									
567046C	2	50	107	16	20	DC24	1.28	70%	G
567047C	2-1/2	65	212	16	20	DC24	1.28	70%	G
567048C	3	80	404	16	20	DC24	1.28	70%	G
567049C	4	100	799	16	20	DC24	1.28	70%	G
567050A	6	150	1929	16	30	DC24	3.57	70%	G


• Kv = The number of m³ per hour of 20° C water at 1 bar pressure drop

Electrical Wiring


AC Voltages

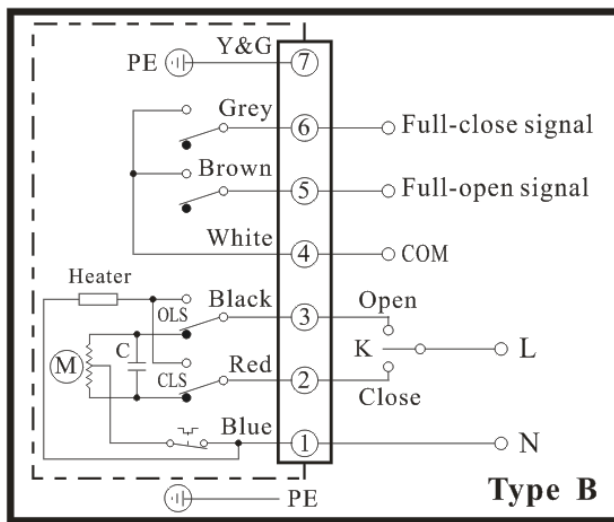

DC Voltages

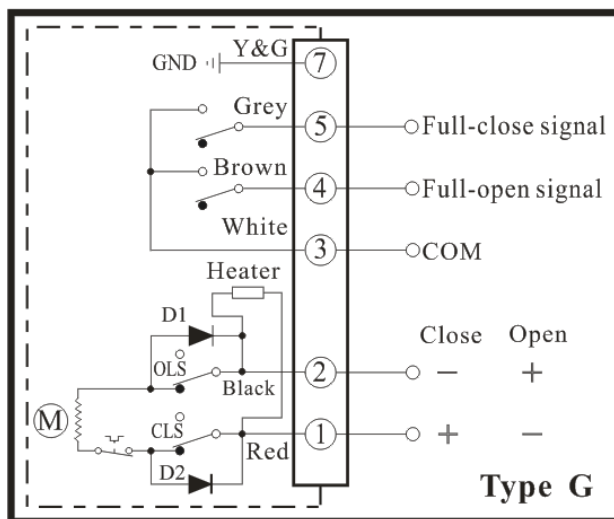

Dimensions:

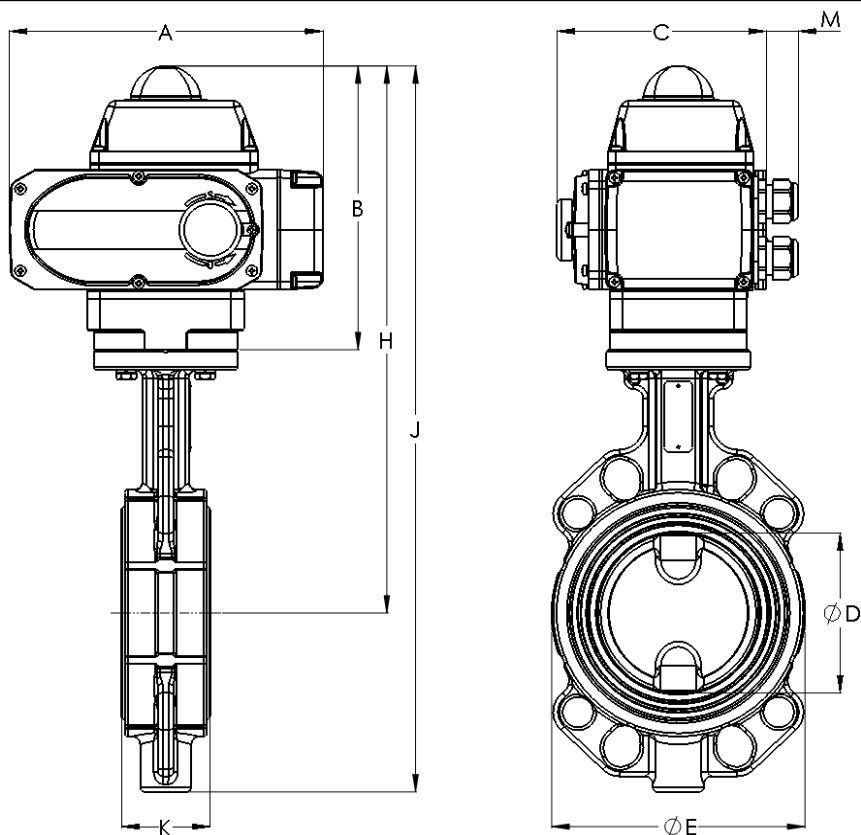

Suitable between flanges:

- ◆ ANSI/ASME B16.5 CLASS150
- ◆ ANSI/ASME B16.1 CLASS125
- ◆ EN1092 PN10, PN16
- ◆ JIS B 2239 10K, 16K
- ◆ BS 10 Table D, Table E

Pipe Size		A	B	C	D	E	H	J	K	M	Weight (AC/DC)
2	inch	6.4	6.2	4.7	2.0	3.9	11.1	14.1	1.8	1.0	10.4 lbs
DN50	mm	162.0	157.0	118.5	50.0	99.0	283.0	359.0	46.0	25.0	4.7 kg
2-1/2	inch	6.4	6.2	4.7	2.6	4.5	11.5	14.7	1.9	1.0	11.5 lbs
DN65	mm	162.0	157.0	118.5	65.0	113.0	291.0	373.0	49.0	25.0	5.2 kg
3	inch	6.4	6.2	4.7	3.2	5.1	12.4	16.1	1.9	1.0	13.3 lbs
DN80	mm	162.0	157.0	118.5	80.0	129.0	314.0	410.0	49.0	25.0	6.0 kg
4	inch	6.4	6.2	4.7	3.9	6.2	12.8	17.2	2.2	1.0	16.8 lbs
DN100	mm	162.0	157.0	118.5	100.0	157.0	324.0	438.0	56.0	25.0	7.6 kg
6	inch	10.1	8.5	6.3	5.9	8.4	14.2	19.8	2.3	1.0	37.0 lbs
DN150	mm	256.0	216.0	160.0	150.0	213.0	360.0	502.0	59.0	25.0	16.8 kg
8	inch	10.1	8.5	6.3	7.9	10.7	15.2	21.9	2.4	1.0	48.9 lbs
DN200	mm	256.0	216.0	160.0	200.0	271.0	385.0	557.0	60.0	25.0	22.2 kg
10	inch	10.1	8.5	6.3	9.8	13.0	19.0	27.4	2.7	1.0	63.9 lbs
DN250	mm	256.0	216.0	160.0	248.9	330.2	481.8	694.9	68.6	25.0	29.1 kg
12	inch	10.1	8.5	6.3	11.8	15.0	17.6	27.2	3.1	1.0	79.3 lbs
DN300	mm	256.0	216.0	160.0	300.0	381.0	448.0	690.0	78.0	25.0	36.0 kg